



Installing Palm Treo 650 Microphone



Step 1 - repair Battery

- Place your Palm Treo 650 on a table in front of you as shown.



Step 2

- Flip the phone over as shown.
- Remove the stylus found on the back of your phone.



Step 3

- Remove battery cover.
- Hold down the button on the back near the middle of the phone.
- Slide the cover down.



Step 4

- Lift the edge of the battery as pictured and pull out.





Step 5 - Case

- Remove the small round rubber cover on the back of the phone.
- This will uncover a screw that will be removed in an upcoming step.



Step 6


- Unscrew six 6.9 mm black screws with a T5 Star screwdriver.
- Unscrew one 9.75 mm antenna screw with a T5 Star screwdriver.
- Pull out antenna.





Step 7

- Pry the back cover off using an iPod opening tool or a similar tool.
- The back cover is attached by several small clips on the inside.

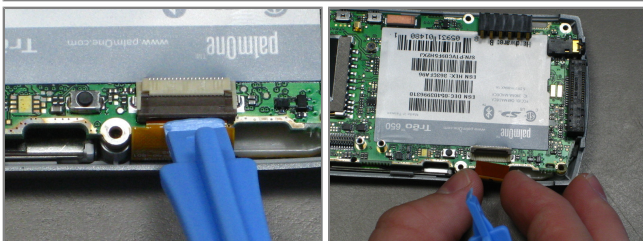

Step 8 - Motherboard


- Unclip the gray tab.
- Pull out the orange ribbon cable.
- Be careful not to remove the motherboard before disconnecting the ribbon cable so it isn't damaged.






Step 9

- Pull off the mother board.

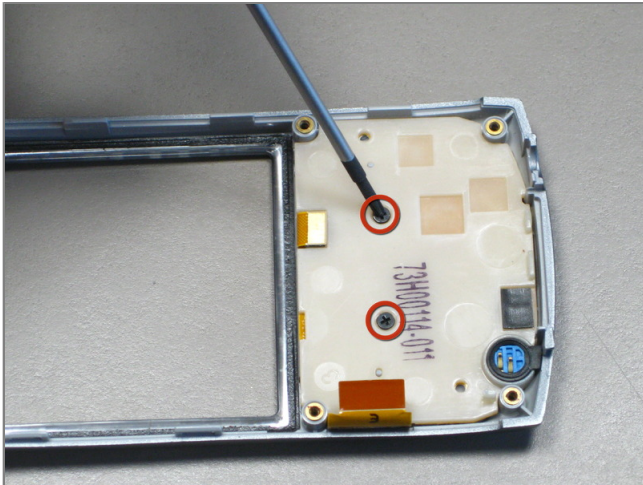


Step 10 - Keyboard

- Unscrew the two 3.2 mm screws with a Phillips #00 screwdriver.

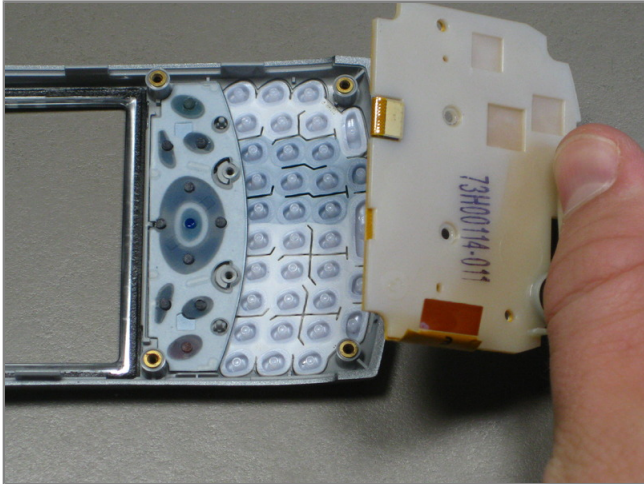


Step 11

- Pull off the circuit board.

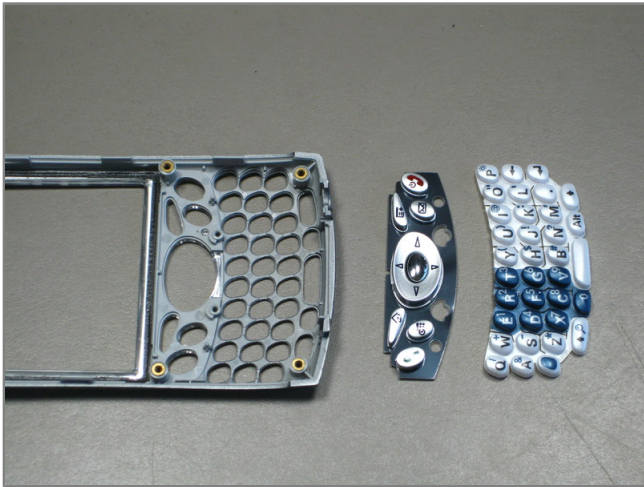


Step 12

- Remove the keypad for cleaning or replacing.

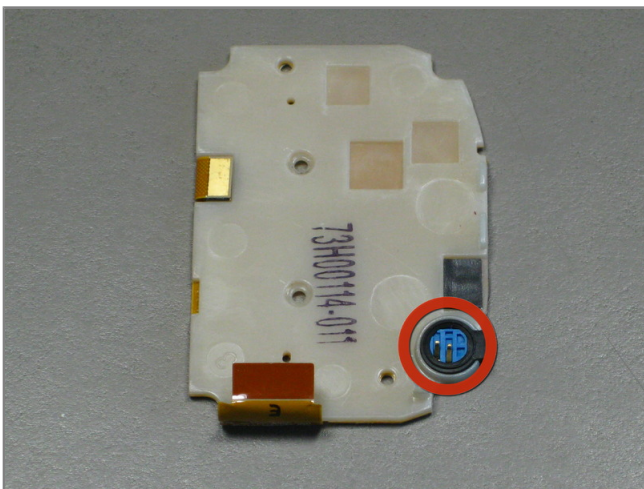

Step 13 - Microphone

- Place the circuit board with the microphone facing up.

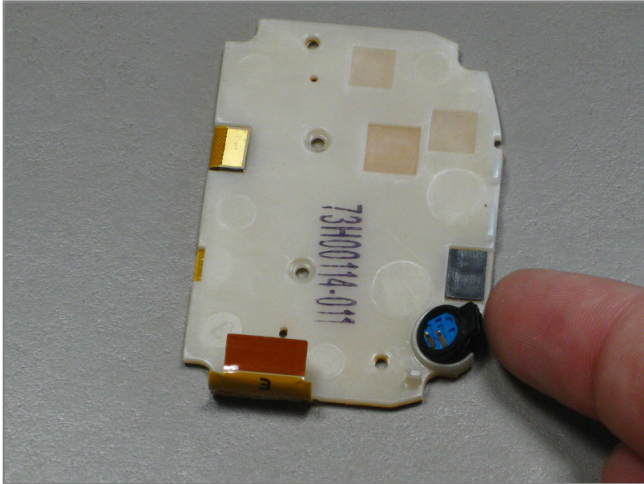

Step 14

- The microphone should be able to pop off easily using your finger.

